


**NUMERATOR & RF CARD READER**

**PROPERTIES**

**Product Code and Name:** SNRI  
**Operating Voltage:** AC/DC 10-30± 5% 50/60 Hz  
**Static Current:** 40 mA  
**Active Current:** 60 mA  
**Storage Space:** 2000 pcs ID Card

**StandBy Time:** 01-99 sec.  
**Reading Distance:** 10-100 mm  
**Ambient Temperature:** -10°C ~+60°C  
**Card Type:** EM or EM compatible card  
**Dimensions:** 140 x 47 x 20 mm

**GENERAL STRUCTURE AND CABLE DIAGRAM OF PARTS**

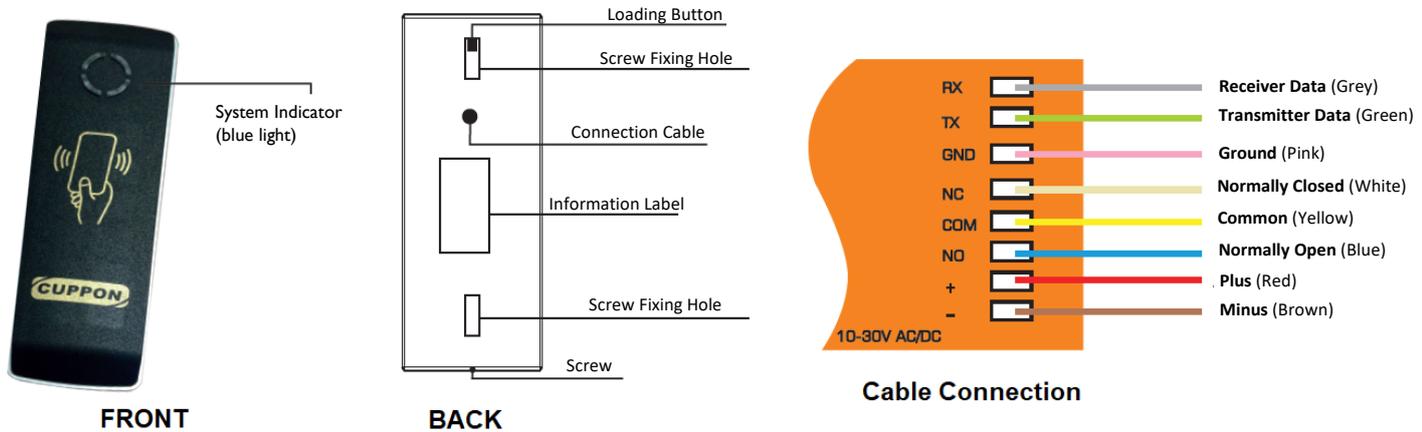

**GENERAL PROPERTIES**

\* FACTORY SETTINGS CONTACT TIME 1 SECONDS

\*THE FIRST CARD INTRODUCED IN THIS PROCESS IS ALWAYS MASTER ADD, THE SECOND ONE IS MASTER CLEAR.

\*2000 PCS OF ID CARD UPLOAD CAPACITY.

\*MASTER CARDS CAN NOT BE DELETED IN ANY CASE, JUST BE INTRODUCED NEW MASTER CARD ON.

\* MASTER CARD INSTRUCTION: PRESS THE BUTTON OF BACKWARD FOR 5 SECOND, FIRST INTRODUCE MASTER ADD AND SECOND MASTER CLEAR AFTER THE SIGNAL, PROCESS IS COMPLETED.

**INSTALLATION**

DESCRIPTION	MASTER PASSWORD	PROCESS	EXIT
NEW CARD TEACHING (BACK TO BACK CAN TEACH A NEW CARD)	SHOW MASTER ADD	SHOW CARD TO ADD	SHOW MASTER ADD
DELETING A CARD (BACK TO BACK CAN BE DELETED CARD)	SHOW MASTER CLEAR	SHOW CARD TO DELETE	SHOW MASTER ADD
MEMORY DELETE (DELETES ENTRY PASSWORD AND ID CARDS - RETURN TO FACTORY SETTINGS)	-	HOLD PRESS ED BU TTON	GIVE ELECTICITY PUSH BUTTON FOR 5 SEC