


RF Receiver

Allows control of the door with a remote control. RF receiver module works with 2 channel remote control (2BY). Power LED turns on when the module is connected to the socket card with RF cable. To introduce the remote to the receiver unit, perform the identification process by pressing the "1" button of the remote at the same time with the Loading Button. You can upload a maximum of 42 passwords to a receiver unit.

When the "1" numbered button of the remote control is pressed, the door leaf moves in the opening direction. Press the "2" number button of the remote control, the digital position switch is turned off. If we want to reactivate the system, press the power button on the digital position switch or the number two button "2" of the remote control.

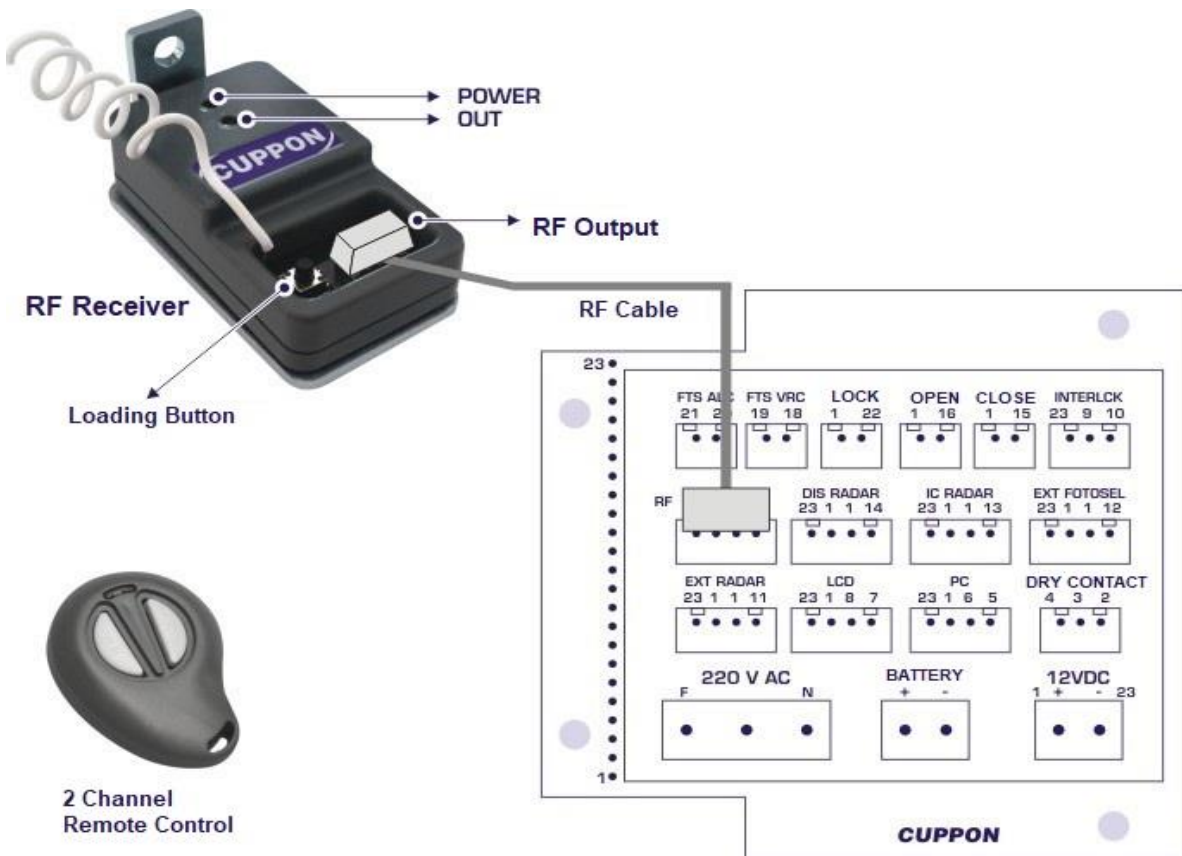

RF Cable:

4 of them 60 cm. long / white socket cable

RF

Black: GND

Red : VCC

Red : VCC

White: RF DATA