


SDM DIMMER CONNECTION SCHEME

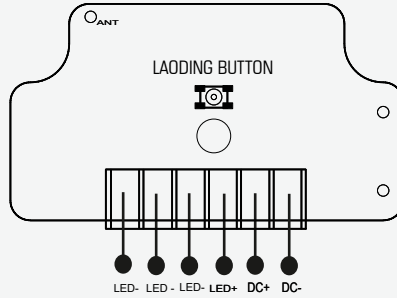

FEATURES

Product code: SDM
Number of Channels: 3 Channel
Frequency: 433,92 MHZ
Operating voltage: 12/24V DC

Channel Output: 12/24V DC
Output Power: 360W
Code Structure: Fix Code

GENERAL INFORMATION

Provide 12 / 24V DC energy to the power terminals of the dimmer card, paying attention to the plus and minus poles as shown in the diagram.

Led Dimmer Receiver has 3 channels. Each channel is 10 Amps maximum.

A total of 30 Amps can be connected to the Dimmer Receiver.

The positive (+) ends of the LEDs are common, and the negative (-) ends are connected through 3 different channels.

REMOTE CONTROL INTRODUCTION

Press the laoding button on the dimmer card by holding button on the remote you want to introduce. The led light will flash during the installation. When the installation is successful, the led light will turn off.

DELETING MEMORY.

When the receiver is energized by holding the laoding button, the stored passwords in your receiver's memory will be deleted.